

Input	Controller Max	RGB Strip	Low Beam/High Beam
Voltage	Load	Wattage	Wattage
12V DC	3 amps	3W	35W Low / 50W High

## Warranty and Disclaimer

Within THREE years after the purchase date, <u>the original buyer</u> may return any XKchrome controller that has failed due to a defect in materials or workmanship. 5.75" LED headlights that have one or more LEDs fail to illuminate due to a defect in materials or workmanship are covered with a THREE year warranty for <u>the original buyer</u>.

Installation of this product must be performed by a licensed professional. Should the failure of the product be the result of damage occurring as a result of improper installation, alteration of the product or an act or omission on the part of the consumer, this warranty is void. XKGLOW Lighting shall not be responsible for any consequential damages which arise from the use and/or installation of the product. If the kit is installed in any manner other than specified, XKGLOW Lighting reserves the right to deny any warranty claims at the discretion of the technical support department. Any product return must include the original packaging, invoice number and a statement of the alleged defect. Upon receipt of the returned product, the company will test the product for defect. If the results of the testing do not support the warranty claim, do not reveal any defect or indicate consumer negligence in the installation and handling of the product, then the product will be returned to you and you will be charged a reshipping fee. If the product is returned from an address within the continental United States, within the first 30 days after purchase, and is found to be defective, XKGLOW Lighting will exchange or refund the original purchase expense. This offer does not extend to the cost for shipping charges on any international packages.

## Additional Disclaimer Terms

Please check your local and state laws for the proper use of this product.

- Improper installation of electrical products such as lighting may cause damage to any vehicle or device to which the improperly handled or installed lighting is attached.
- Improperly installed product may cause electrical injury to persons.
- It is recommended that the kit should be installed by a licensed professional.
- XKGLOW assumes no liability for the installation of the product.
- Warranty or liability will not exceed the product purchase price, which shall be buyer's sole and exclusive remedy.


# Return/Exchange Procedure

- 1. Email [xk@xkglow.com] to notify us of the product issue as well as the item number and name of customer on invoice.
- 2. We will send you the trouble-shooting guide to fix the issue, or to narrow down which of the component(s) need to be replaced. If the issue still exists, we will ask you to send back the defective items to be replaced.
- 3. Please send the returned item as instructed, along with claims and a telephone number where you can be reached.
- After the returned item(s) have been accepted and inspected, we will issue a refund or replace the items ASAP. For refunds, item(s) must be sent to XKGLOW within 14 days from date of purchase. Original shipping charges are not refundable.

We always stand behind our products and are committed to our customers! For questions you may have, please contact xk@xkglow.com. We normally respond within 24 hours. (Monday-Friday).


#### Mounting Instructions

Test all components before mounting: As shown below, plug <u>ALL</u> light units together and connect them to the controllers and the switch wiring harness. Connect the RED battery terminal to the POSITIVE pole of 12V DC battery. Connect the BLACK battery terminal to the NEGATIVE pole. Turn on the switch and push the controller buttons to test the headlights. If the lights show any defects, please contact us and we will be happy to replace them for you.

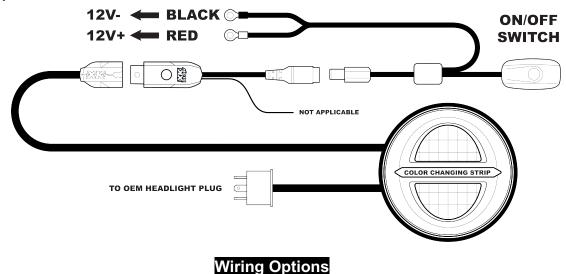

# **Option A. Wire Direct to Battery:** To independently control the color changing strip without your motorcycle being powered on, you must wire the power wire harness directly to the battery. With this setup, the strip must be turned on via the ON/OFF switch or the XKchrome App. Firmly connect the wire terminals on the harness to the positive and negative terminals on the battery.

- **Option B.** Wire to Ignition Source: Wiring the power wire harness to an ignition source will make the color changing strip turn on automatically when the vehicle is powered on. Note- you will not be able to control the strip independently of the motorcycles power. To do this, simply wire the <u>red</u> wire on the power wire harness to an ignition wire source utilizing an add-a-fuse (not included). Ensure that the fuse is capable of handling the extra current load from the added accessories. Connect the <u>black</u> wire on the power wire harness to a nearby ground.
- 2. Remove the factory headlight: Remove the single phillips head screw holding the trim ring in place. Remove the trim ring. After the trim ring is removed, you can now remove the headlight assembly. Unplug the headlight.
- 3. Route power wiring harness: Mount the ON/OFF switch in a convenient location. Route the DC plug towards the new headlight. Using zip ties, secure any loose wiring.



- 4. Install XKchrome Mini Controller: Plug the XKchrome Mini controller into Attach 3M tape to the bat the DC plug from the power wiring harness. Plug the other end of the Mini controller into the headlight.
- 5. Install the new LED headlight: Now that the factory headlight is removed and the wiring is complete, it's time to install the new XKGLOW headlight. Simply follow the steps taken to remove the factory headlight but in reverse order. Plug the headlight in and reinstall the metal trim ring.
- 6. Power on, download the XKchrome App, and enjoy!



**Please note:** There are multiple XKGLOW apps on the App Store. Only the XKchrome App will work with the XKchrome Bluetooth Controller. The App icon is pictured here.